

HELI

CDD20R Electric Rider Stacker

Characteristics

Configuration and performance

- Low gravity centre provides good stability.
- Damping cushion offers low-noise operation.
- Built-in pressure relief valve protects the truck from overloads, and thus increases the reliability.
- Multi-function display with BDI and hour meter is adopted.
- AC motor eliminates carbon brush replacement.
- Low voltage protection setting prolongs the battery life.
- Sideway battery is convenient for exchanging and maintaining.
- The mast and the frame are dividable and exchangeable.
- CANbus technology reduces wiring complexity and increase reliability.
- Hall element reduces wear components, offering increased component life.
- Vertical driving wheel offers small turning radius; dustproof waterproof motor is easy for maintenance.
- Supporting legs in both sides for triplex mast.

Safety




- Emergency reversing device on handle ensures truck safety.
- Emergency power disconnect switch is assembled on the truck.
- Brake state in handle upright and horizontal position of handle increases the reliability.
- The truck can automatic decelerate when quick turning.

AC / EPS

CDD20R

Manufacturer's Data and Technical Characteristics

Character		合力	
1.01 Manufacturer			CDD20R (6.5m)
1.02 Model			
1.03 Load capacity	Q	kg	2000
1.04 Load center distance	C	mm	600
1.05 Driving mode			Stand-on
1.06 Front overhang	x	mm	672
1.07 Wheel base	Y	mm	1378
Tyre			
2.01 Tyre type			Polyurethane
2.02 Wheels number,Front/rear(X=driven wheels)			1x2/4
2.03 Track Width,front	b10	mm	580
2.04 Track Width,rear	b11	mm	404/525
2.04 Wheel size, front		mm	ø250x70
2.05 Wheel size, rear		mm	ø80x84
2.06 Wheel size, additional		mm	ø150x60
Dimension			
3.01 Lift height	h3	mm	2500/3000/3300/3500/4500/5000/5600
3.02 Height, mast extended	h4	mm	2955/3455/3755/3955/5030/5510/6110
3.03 Height, mast lowered	h1	mm	1735/1985/2135/2235/2050/2210/2410
3.04 Height,lowered	h13	mm	1300/1550/1700/1800/1570/1740/1940
3.05 Initial lift	h5	mm	90
3.06 Fork size	s/e/l	mm	60/180/1070(1150)
3.07 Overall length	l1	mm	2020/2100
3.08 Length to face of forks	l2	mm	950
3.09 Overall width	b1	mm	850
3.10 Width across forks	b5	mm	570/695
3.11 Turning radius	Wa	mm	1655
3.12 Aisle width with pallet 800Wx1200L,clearance 200	Ast	mm	2515
3.13 Aisle width with pallet 1200Wx1000L,clearance 200	Ast	mm	2535
3.14 Ground clearance	m2	mm	31
Performance			
4.01 Travelling speed,laden/unladen		km/h	7/7.1
4.02 Lifting speed,laden/unladen		m/s	0.11/0.16
4.03 Lowering speed,laden/unladen		m/s	0.12/0.11
4.04 Gradeability,laden/unladen		%	6/15
Electrical configuration			
5.01 Drive motor power		kw	1.5
5.02 Lifting motor power		kw	3
5.03 Battery voltage		V	24
5.04 Battery capacity		Ah	300
5.05 Battery dimensions l/w/h		mm	675x254x500
5.06 Controller			CURTIS
5.07 Brake			Electromagnetic
Weight			
6.01 Total weight(with battery)		kg	1280/1320/1350/1640/1680/1720/2020
6.02 Battery weight		kg	300

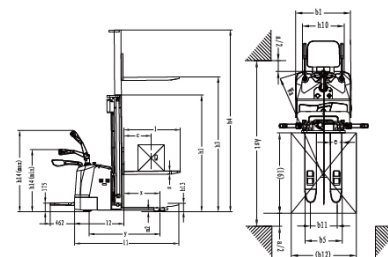

ANHUI HELI CO., LTD.
Add / No.668, FangXing Road, Hefei, China
Fax / +86-551-63639966

Tel / +86-551-63639068(America); 63639258(Europe);
63639358(Asia); 63662105(Africa & Middle East);
63639530(Key Accounts Division); 63662105(Wheel loader)

* Our products are subject to improvements and changes without notice.

Design&Print:Fokeli Printing 20200921