



Low level order pickers



OPD12L A2ELIH

Lift height: 960mm/Load capacity: 1200kg

HELI

OPD12L A2ELIH

HELI

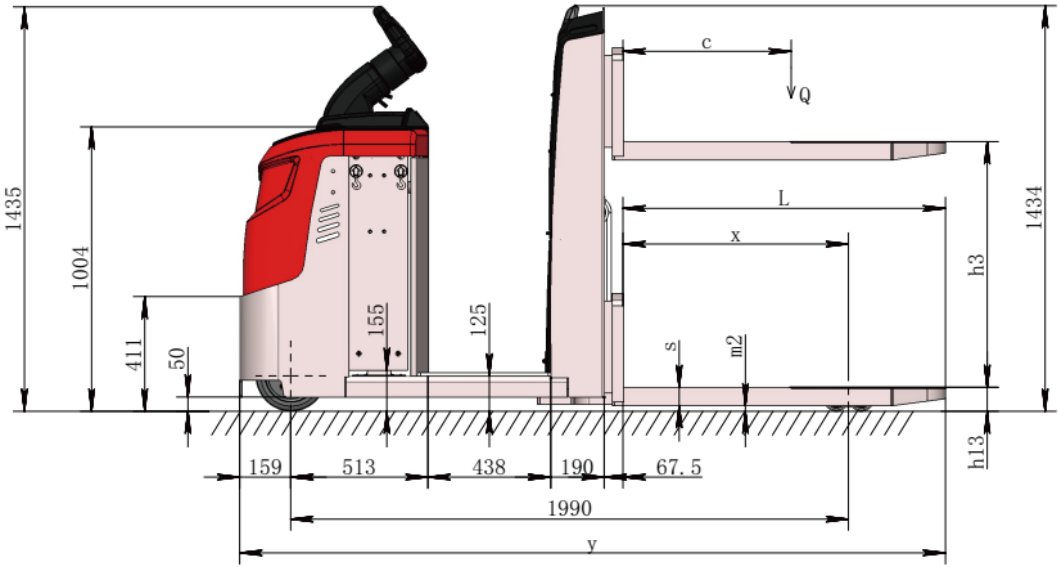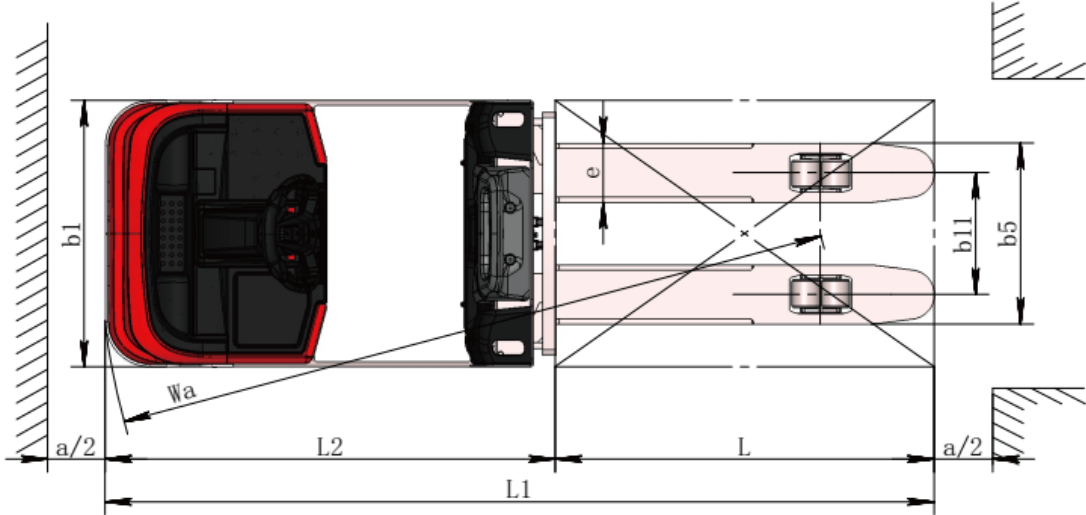

Manufacturer and Technical Data

Features					
1.01	Manufacturer (abbreviated description)			HELI	
1.02	Manufacturer's type designation			OPD12L-A2ELIH	
1.03	Drive type			electric	
1.04	Driving style			Stand-on type	
1.05	Load capacity	Q	kg	1200	
1.06	Load centre distance	c	mm	600	
1.07	Load distance, centre of drive axle to fork		mm	810	
1.08	Wheelbase	x	mm	1990	
Weight					
2.01	Total weight		kg	1237	
2.02	Axle load laden front/rear		kg	975/1462	
2.03	Axle load unladen front/rear		kg	900/337	
Vehicle wheel					
3.01	Tyres			Polyurethane	
3.02	Minimum turning radius	Wa	mm	2188	
3.03	tyre size	Load wheel (diameter/width)	mm	85/85	
		Driving wheel(diameter/width)	mm	250/80	
		Auxiliary wheel(diameter/width)	mm	140/54	
3.04	Wheels,number (x=driven)			1+1x/2	
Basic dimensions					
4.01	Full height		mm	1435	
4.02	lift height	h3	mm	960	
4.03	Dimensions	Total length	L1	mm	2518
		Total width	b1	mm	810
		Total height		mm	1434
4.04	Fork dimension	s/e/l	mm	65/180/1150	
4.05	Bodywork length	L2	mm	1368	
4.06	Outer width of forks	b5	mm	550	
4.07	Minimum height of the fork	h13	mm	85	
4.08	Ground clearance centre of wheelbase	m2	mm	25	
4.09	Aisle width(pallet 800x1200 length)		mm	2730	
Performance data					
5.01	Travel speed laden/unladen		km/h	9.5/12.5	
5.02	Lift speed laden/unladen		mm/s	175/300	
5.03	Lowering speed laden/unladen		mm/s	210/210	
5.04	Max.gradeability laden/unladen		%	5/15	
5.05	Service brake			generative	
Electric motor/electronics					
6.01	Battery		V/Ah	24/404	
6.02	Drive motor		kW	3	
6.03	Lift motor		kW	3.2	
Other					
7.01	Type of drive control			AC	
7.02	Steering version			electric	

CONFIGURATION PARAMETER

Serial number	Configuration eigenvalues	Configure options	Standard configuration	Optional configuration
1	Tire Form	Front and rear polyurethane tires	✓	
2	Battery replacement method	Side pull and lift	✓	
3	Fork size-outside spread	550mm	✓	
		685mm		✓
4	Fork length	1150mm	✓	
		1220mm		✓
5	Fork height-lowered	85mm	✓	
6	Storage battery	HEDING 24V/404Ah	✓	
		PENGCHENG 24V/456Ah		✓
7	Boot mode	Key switch	✓	
		Swipe card		✓
8	Reverse buzzer	No reverse buzzer	✓	
		Equip a reverse buzzer		✓
		Equip a reverse voice horn		✓
9	Packing method	HELI packaging	✓	
		Neutral packaging		✓
10	Signage	Signs in Chinese	✓	
		English(English) signage		✓
		English(American) signs		✓



ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China

Fax / +86-551-63639966

Tel / +86-551-63639068(America); 63639258(Europe);

63639358(Asia); 63662105(Africa & Middle East)



LinkedIn



YouTube



Facebook