




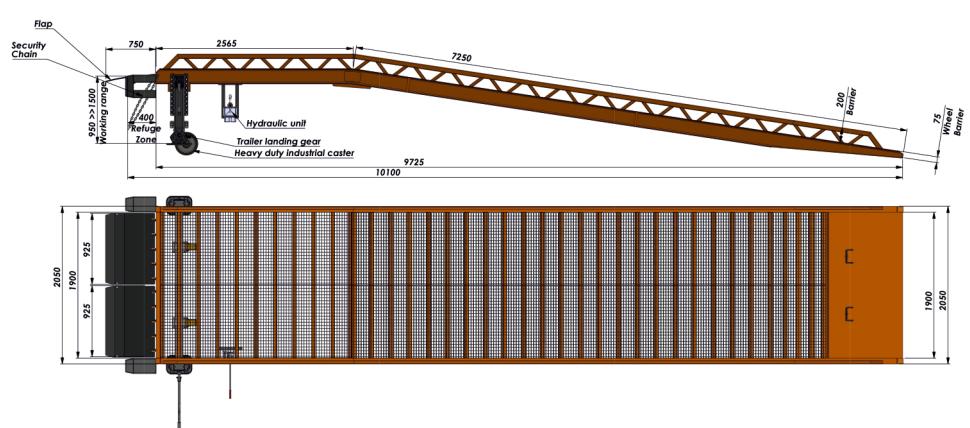

<b>PYR - PTW</b>	Tailless, Wheel Mobile Loading Ramp
<b>Ramp Type</b>	Mobile
<b>Distinctive Features</b>	<p>This model, featuring a fixed tail, is 10.10m long. The decreasing slope facilitates the forklift's climbing ability. The easy use of the hydraulic equipment reduces the likelihood of malfunctions and maintenance. The weight of the ramp does not put pressure on the loaded vehicle via the front trailer jack stand.</p>
<b>Application Area</b>	Outdoor/Indoor Area – Field
<b>Ramp Surface</b>	Full-pressure twisted notched grating
<b>Wheel Type</b>	Caster Wheels
<b>Capacity</b>	6 / 8 /10 TON
<b>Maneuver Type</b>	The forklift connection allows for directional mobility. It utilizes a fixed-direction (forward-backwards) pneumatic wheel for movement, with steering controlled from the rear. This setup enables manoeuvring in spacious areas.

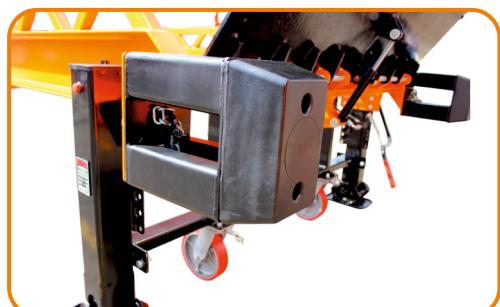

Optional Forklift Sleeve

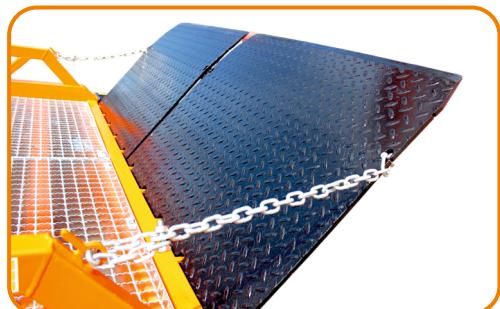

Optional Security Barrier

